

MULTIVESSEL BATCH DISTILLATION ¹

SIGURD SKOGESTAD ², BERND WITTGENS,
EVA SØRENSEN ³ and RAJAB LITTO

Norwegian University of Science and Technology (NTNU),
Department of Chemical Engineering,
7034 Trondheim, Norway

Submitted for publication in *AIChE Journal*, 21 May 1996

Revised version: 9 October 1996

Abstract - The multivessel batch column consists of a reboiler, several column sections and intermediate vessels and a condenser vessel. This configuration provides a generalization of previously proposed batch distillation schemes, including the inverted column and the middle vessel column. The total reflux operation of the multivessel batch distillation column was presented recently, and the main contribution of this paper is to propose a simple feedback control strategy for its operation. We propose to adjust the vessel holdups indirectly, by manipulating the reflux flow out of each vessel to control the temperature at some location in the column section below. The feasibility of this strategy is demonstrated by simulations.

1 Introduction

Although batch distillation generally is less energy efficient than continuous distillation, it has received increased attention in the last few years because of its simplicity of operation, flexibility and lower capital cost. For many years academic research on batch distillation was focused primarily on optimizing the reflux policy for the conventional batch distillation column (also called the batch rectifier, where the feed is charged to the reboiler and the products are drawn from the top of the column).

More recently, one has started re-examining the operation of batch distillation as a whole. A total reflux strategy, where the final products are collected in the condenser drum and in the reboiler, was suggested independently by Treybal (1970) and Bortolini and Guarise (1971). Sørensen and Skogestad (1994) found the total reflux operation to be better for separations with a small amount of light component. A generalization of the total reflux strategy is the cyclic operation described by Sørensen and Skogestad (1994). Here, the operation is

¹The paper was originally presented at the AIChE Annual Meeting, Nov. 1995, Paper 184i.

²Author to whom correspondence should be addressed, fax: +47 7359 4080; E-mail: skoge@kjemi.unit.no

³Department of Chemical and Biochemical Engineering, University College London, WC1E 7JE, Great Britain

switched between total reflux operation and dumping of the product (i.e.: the condenser holdup is introduced as an additional degree of freedom).

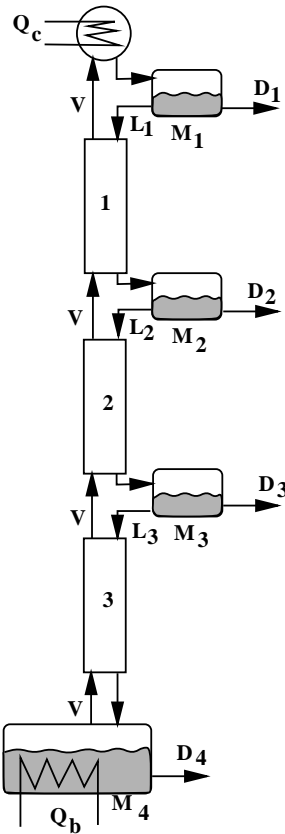


Figure 1: General multivessel batch distillation column for a case with 4 vessels

Robinson and Gilliland (1950) proposed an inverted batch column, also called the batch stripper, where the feed is charged to the top and the heavy products are drawn from the bottom of the column. Sørensen and Skogestad (1995) found that, also in this case, the inverted column is better than the conventional column for separations with a small amount of light component. Bernot *et al.* (1991) studied the use of this column for separating azeotropic mixtures.

A further generalization of the inverted column is the middle vessel column, which has both a rectifying and stripping section. This configuration was first mentioned by Robinson and Gilliland (1950, p. 388) and was first analyzed for binary mixtures by Bortolini and Guarise (1971) and later studied in the Russian literature (e.g. Davidyan *et al.*, 1991; see the updated English translation in Davidyan *et al.*, 1994). The middle vessel column is also sometimes referred to as the “complex” batch distillation column (Mujtaba and Macchietto, 1992). Bortolini and Guarise (1971) proposed to charge a *binary* feed mixture to the middle vessel and draw products from both the top and the bottom, such that the composition in the middle vessel was approximately constant during the operation, and operation stops when

the middle vessel is empty. This mode of operation is found to be optimal in some cases (Meski and Morari, 1995).

Hasebe *et.al.* (1992) proposed to charge a *ternary* mixture to the middle vessel, and let the light and heavy impurities be drawn from the top and the bottom of the column. In this case the operation stops when the intermediate component in the middle vessel has reached its desired purity. Mujtaba and Macchietto (1992, 1994) studied the case where a chemical reaction takes place in the middle vessel, and conversion can be increased by removing the products.

A further generalization is the multivessel column suggested by Hasebe *et.al.* (1995). They proposed a total reflux operation where the products are collected in vessels along the column. Because one may view this column as a stacking of several columns on top of each other, they denote this process a “multi-effect batch distillation system” (MEBAD).

All the above designs and strategies can be realized in the *multivessel batch distillation column* shown in Figure 1, where both the holdups, $M_i(t)$, and product flows, $D_i(t)$, are degrees of freedom. With N_c vessels along the column and with given pressure and heat input, this column has $2N_c - 1$ degrees of freedom for optimization; namely the $N_c - 1$ holdups $M_i(t)$ (*e.g.*: controlled by the $N_c - 1$ reflux streams) and the N_c product rates $D_i(t)$.

Further generalizations are possible, for example, by adding feed streams (semi-batch operation), by taking out liquid or vapor streams other places in the column, or by using intermediate heaters or coolers.

The simplest strategy for operating the multi-vessel column, which is the focus of this paper, is the *total reflux operation* suggested by Hasebe *et.al.* (1995) where the N_c product rates are set to zero ($D_i = 0$). There are at least two advantages with this multivessel column compared to conventional batch distillation where the products are drawn over the top, one at a time. First, the operation is simpler since no product change-overs are required during operation. Second, the energy requirement may be much less due to the multi-effect nature of the operation. In fact, Hasebe *et.al.* (1995) found that for some separations with many components the energy requirement may be similar to that for continuous distillation using $N_c - 1$ columns.

Hasebe *et.al.* (1995) propose to “control” the total reflux multivessel batch distillation column by calculating in advance the final holdup in each vessel and then using a level control system to keep the holdup in each vessel constant. For cases where the feed composition is not known exactly they propose to, after a certain time, adjust the holdup in each vessel based on composition measurements. Their scheme, involving the optimization of the vessel holdups and their adjustment based on composition measurement in these vessels, is rather complicated to implement and it requires an advanced control structure to implement the control law.

The main contribution of our paper is to propose, for the total reflux operation of the multivessel column, a feedback control structure based on $N_c - 1$ temperature controllers

(see Fig. 2). The idea is to adjust the reflux flow out of each of the upper $N_c - 1$ vessels by controlling the temperature at some location in the column section below. There is no explicit level control, rather the holdup, M_i , in each vessel is adjusted indirectly by varying the reflux flow to meet the temperature specifications.

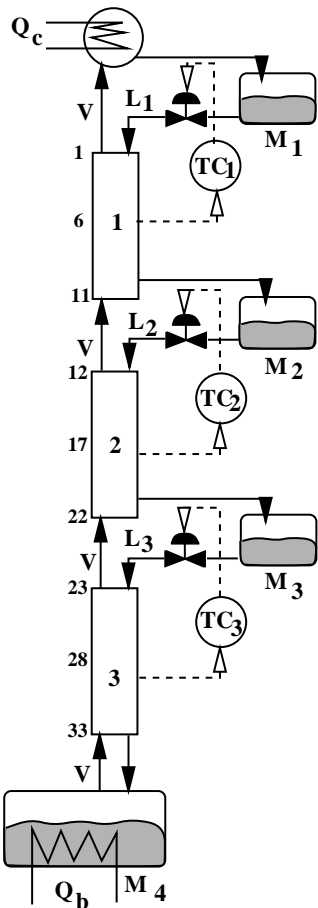


Figure 2: Feedback control structure for multivessel batch distillation column under total reflux

In addition to the dynamic simulations which show the feasibility of the proposed scheme, we present the steady-state values which would be achieved if we were to let the batch time approach infinity ($t \rightarrow \infty$). Of course, in practice we want the batch time to be as short as possible, and we would terminate the batch when the specifications are met or the improvement in purity is too small. Nevertheless, the steady-state values are interesting because they give the achievable separation for a given case.

2 Simulation model

All the results in this paper are based on simulations using the dynamic model described in the Appendix. We have made a number of simplifying assumptions, such as constant molar flows, constant relative volatility, linear boiling point curve, constant stage holdup and constant pressure. These assumptions are introduced to simplify the model similar results are obtained when the assumptions are relaxed. The dynamic model is implemented using the SPEEDUP software package (Speedup, 1993). In all simulations we neglect the time to heat up the column and feed mixture to the boiling temperature (i.e. “hot” startup is assumed).

In the simulations we consider a four-component mixture, the column consists of three sections and four vessels (including reboiler and condenser). The data for the mixture and the column are summarized in Table 1. The numerical values of the relative volatility are chosen to be close to those of the system methanol-ethanol-propanol-butanol. As mentioned, we assume the mixture temperature, T_k , on stage k to be the molar average of the boiling temperatures of the pure components ⁴

$$T_k = \sum_{j=1}^{N_c} x_j \cdot T_{b,j} \quad (1)$$

where $T_{b,j} = [64.7, 78.3, 97.2, 117.7]^{\circ}C$.

In the simulations we consider two feed mixtures; one equimolar (z_{F1}), and one with smaller amounts of components 2 and 4 (z_{F2}). In all cases the initial (at $t = 0$) vessel holdup is the same ($M_i = 2.5 \text{ kmol}$) in all four vessels, and the initial composition in all vessels is equal to that of the feed mixture. We start the simulations with a “hot” column, that is, the time needed to heat up the column and the feed mixture is not considered. In all simulations, the vapor flow is kept constant at $V = 10 \text{ kmol/h}$.

Table 1: Summary of column data and initial conditions

⁴The linear boiling point curve assumption may seem very crude. However, we have performed simulations where temperatures are computed from *Raoult's* law for ideal mixtures, $p_{tot} = \sum_{j=1}^{N_c} x_j \cdot p_j^{sat}(T)$, and the *Clausius-Clapeyron* equation for the pure component vapor pressures, $p_j^{sat}(T) = \exp\left(-\frac{\Delta H_{vap,j}}{R} \left(\frac{1}{T} - \frac{1}{T_{b,j}}\right)\right)$, and the results show only minor deviations.

Number of components	$N_c = 4$
Relative volatility	$\alpha_j = [10.2, 4.5, 2.3, 1]$
Total number of stages	$N_{tot} = 33$
Number of sections	3
Number of stages per section	$N_i = 11$
Vessel holdups	$M_{i,0} = 2.5 \text{ kmol}$
Tray holdups (constant)	$M_k = 0.01 \text{ kmol}$
Total initial charge	$M_{tot} = 10.33 \text{ kmol}$
Reflux flows	$L_{i,0} = 10 \text{ kmol/h}$
Vapor flow (constant)	$V = 10 \text{ kmol/h}$

3 Total reflux operation with constant vessel holdups

In this section we follow Hasebe *et.al.* (1995) and present simulations which demonstrate the feasibility of the multivessel batch distillation under total reflux. The holdup of each vessel is calculated in advance by taking into account the amount of feed, feed composition and product specifications. After feeding the predescribed amount of raw material to the vessels, total reflux operation with constant vessel holdup is carried out until the product specifications are achieved, or until the improvement in product purity with time is too slow to justify further operation.

The simulated composition profiles as a function of time are shown in Figure 3 for the equimolar feed mixture

$$z_{F1} = [0.25, 0.25, 0.25, 0.25] \quad (2)$$

The holdup in each vessel is kept constant at $M_i = 2.5 \text{ kmol}$ during the simulation. The purity of the main component in each of the vessels is seen to improve nicely and levels off after about 2 hours. As time goes to infinity the steady-state compositions presented in Table 2 are achieved. The steady state purity of the main component is better than 99% in the top and bottom vessels, and is about 96% in the two intermediate vessels.

However, in practice, it may be difficult to keep the vessel holdups constant, and the composition of the feed mixture may be uncertain. The results may be sensitive to holdup errors as is illustrated by considering a case where the actual feed composition is

$$z_{F2} = [0.30, 0.10, 0.40, 0.20] \quad (3)$$

but the holdup of each vessel is kept constant at $M_i = 2.5 \text{ kmol}$, which are the vessel holdups corresponding to the equimolar feed composition, z_{F1} . This results in large changes in the final vessel compositions as seen from Table 3. For example, the purity in vessel 2 is reduced from about 96% to 40%, whereas the purity in vessel 3 is improved from 96% to 99.9%.

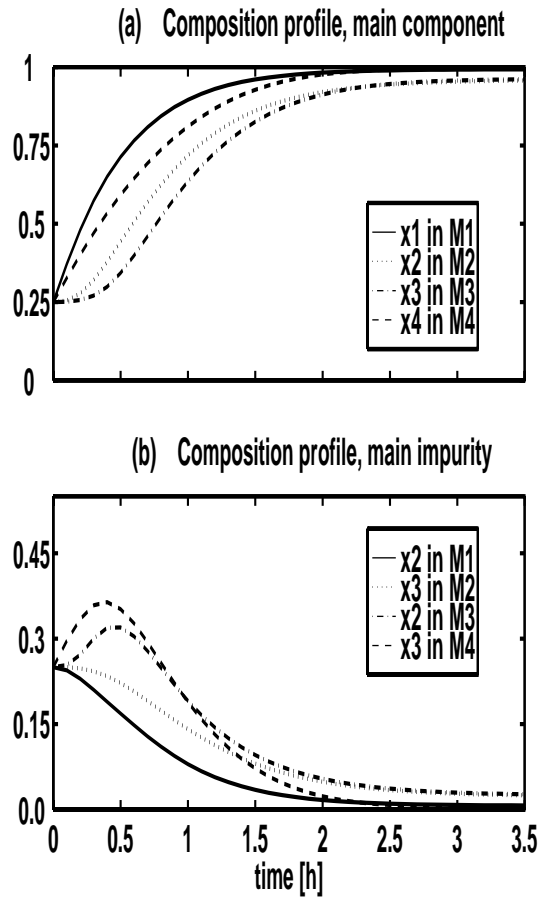


Figure 3: Constant vessel holdup for feed mixture z_{F1} : Composition response in accumulator (1), vessel 2, vessel 3 and reboiler (4)

Table 2: Constant vessel holdups for feed mixture z_{F1} : Steady-state compositions

	Vessel 1	Vessel 2	Vessel 3	Vessel 4
M_i [kmol]	2.5	2.5	2.5	2.5
x_1	0.993	0.017	0.0	0.0
x_2	0.007	0.959	0.025	0.0
x_3	0.0	0.024	0.963	0.004
x_4	0.0	0.0	0.012	0.996

Table 3: Constant vessel holdups for feed mixture z_{F2} : Steady-state compositions

	Vessel 1	Vessel 2	Vessel 3	Vessel 4
M_i [kmol]	2.5	2.5	2.5	2.5
x_1	0.999	0.203	0.0	0.0
x_2	0.001	0.404	0.001	0.0
x_3	0.0	0.393	0.999	0.180
x_4	0.0	0.0	0.0	0.820

To compensate for these feed variations Hasebe *et.al.* (1995) propose a rather complicated algorithm for adjusting the holdup based on measuring the composition in the vessels. We propose a much simpler feedback scheme which is discussed in the next section.

4 Feedback control of multivessel column

We now present results for our proposed control structure for the total reflux operation; see Figure 2. The separation of a mixture containing N_c components requires N_c vessels and $N_c - 1$ temperature controllers. The i 'th temperature controller (TC_i) controls the temperature (T_i) in the middle of the i 'th column section, using as a manipulated input the reflux flow (L_i) out of the vessel above that column section. This enables an indirect control of the holdup (M_i) in that vessel. Note that there is no level controller or level measurement, although some minimum and maximum level sensors may be needed for safety reasons.

The simplest strategy is to let the setpoint for each temperature controller be set as the average boiling temperature of the two components being separated in that column section. This simple strategy is used in the simulations. Alternatively, to reduce the batch time for a specific separation, the setpoints may be obtained from steady-state calculations corresponding to the desired separation, or they may even be optimized as functions of time. However, it is believed that in most cases, except when the number of stages in the column is close to the minimum for the desired separation, the simple strategy will be acceptable.

To demonstrate the feasibility of our proposed control scheme we consider the same column as studied in the previous section (see Table 1). To prove that the scheme is insensitive to the initial feed composition we consider two different initial feed compositions, z_{F1} (Eq. 2) and z_{F2} (Eq. 3).

We use simple proportional temperature controllers to manipulate the reflux flow

$$L_i = K_c \cdot (T_i - T_{s,i}) + L_{i,0} \quad (4)$$

where we selected the controller bias as $L_{i,0} = V = 10$ kmol/h. The numerical values of the controller gain, K_c and temperature setpoints, $T_{s,i}$, are given in Table 4. The controller gains were selected such that an offset in the temperature of $\Delta T_i = 10^\circ C$ yields a change in the corresponding reflux flow of $\Delta L_i = 2.5$ kmol (25% of the nominal flowrate). The temperature

sensors are located in the middle of each column section, and, as already mentioned, the setpoint, $T_{s,i}$, for each section is the average boiling temperature of the components being separated in that section.

Table 4: Data for temperature controllers

	$T_{s,i}$ [$^{\circ}C$]	K_c [$^{\circ}C/kmol$]	location *
TC_1	71.5	-0.25	6
TC_2	87.75	-0.25	17
TC_3	107.2	-0.25	28

* stage no. from top of column

Table 5: Temperature control (independent of feed composition): Steady-state compositions

	Vessel 1	Vessel 2	Vessel 3	Vessel 4
x_1	0.993	0.016	0.0	0.0
x_2	0.007	0.967	0.034	0.0
x_3	0.0	0.017	0.960	0.007
x_4	0.0	0.0	0.006	0.993

With these temperature controllers (see Table 4), we achieve for *both* feed mixtures the same steady-state compositions ($t \rightarrow \infty$) given in Table 5. These steady state compositions are very close to those found earlier for feed mixture z_{F1} with constant vessel holdups of $M_i = 2.5 kmol$; compare Tables 2 and 5.

As expected, for feed mixture z_{F1} , the steady-state vessel holdups are close to 2.5 *kmol*; see the first row in Table 6. The composition time responses for feed mixture z_{F1} is shown in Figure 4 (a) and (b). The responses are similar to those with constant vessel holdups shown in Figure 3 (a) and (b); the difference is that the approach to steady state is faster in vessels 1 and 4 and slower in vessels 2 and 3 for the control structure employing temperature control.

Table 6: Temperature control for feed mixtures z_{F1} and z_{F2} : Steady-state vessel holdups

	Vessel 1	Vessel 2	Vessel 3	Vessel 4
feed	M_1 [<i>kmol</i>]	M_2 [<i>kmol</i>]	M_3 [<i>kmol</i>]	M_4 [<i>kmol</i>]
z_{F1}	2.506	2.452	2.512	2.530
z_{F2}	3.053	0.788	4.159	2.000

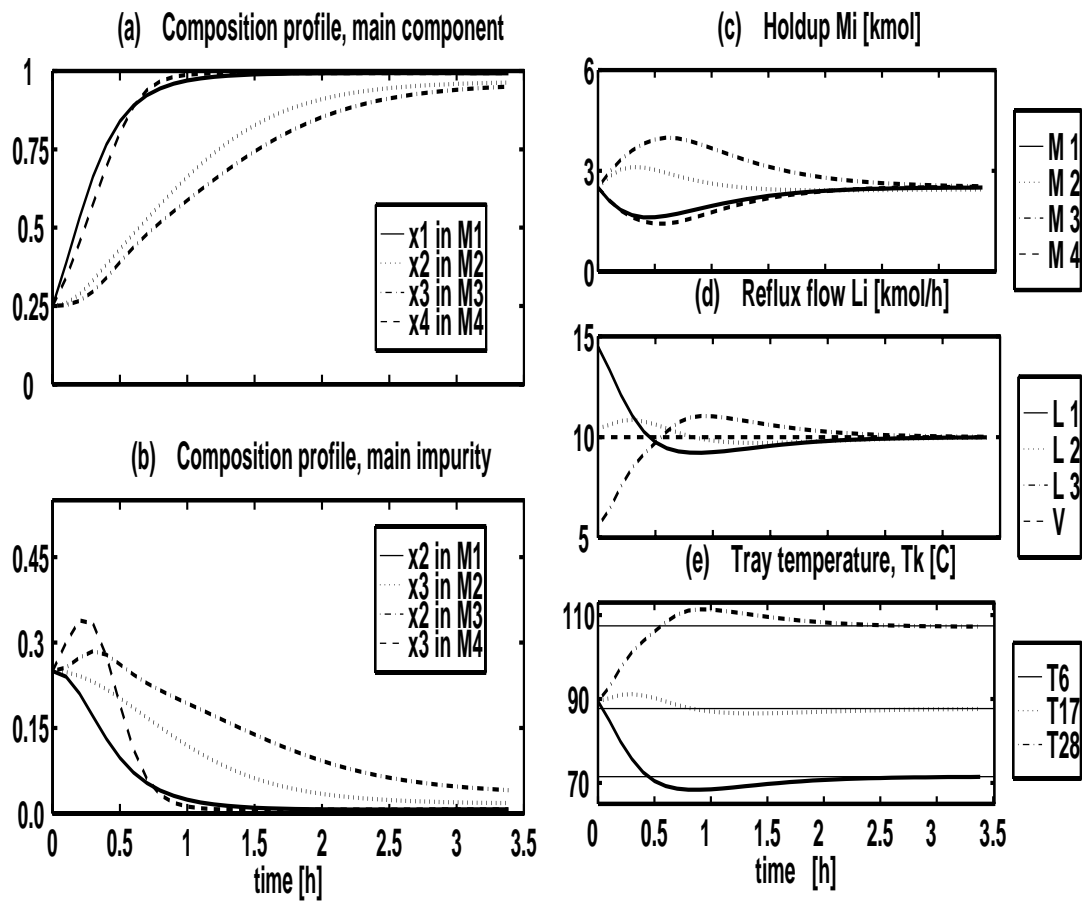


Figure 4: Temperature control for feed mixture $z_{F,1}$: Vessel compositions (a), impurities (b), holdups (c), reflux flows (d) and tray temperatures (e) as a function of time

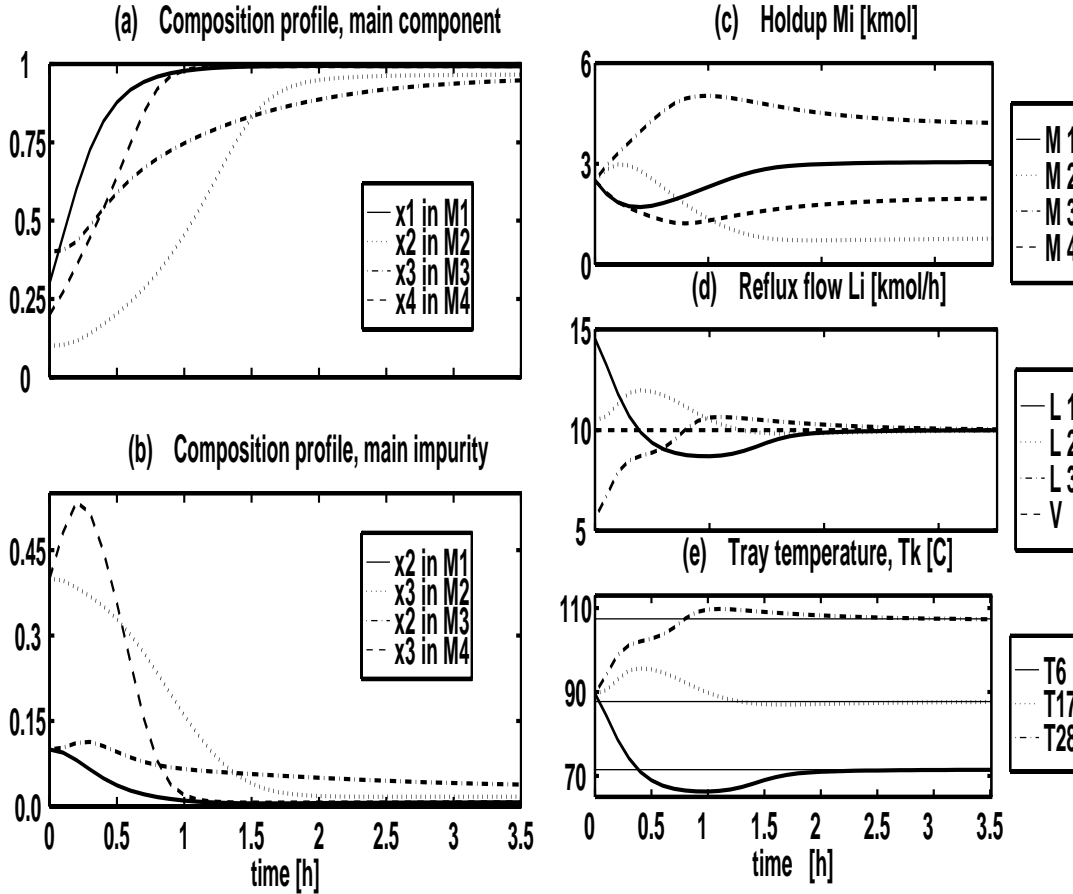


Figure 5: Temperature control for feed mixture z_{F2} : Vessel compositions (a), impurities (b), holdups (c), reflux flows (d) and tray temperatures (e) as a function of time

In Figures 4 we also present for the time responses for the holdups in the vessels (c), the reflux flows out of the vessels (d), and the controlled temperatures (e). The simulations demonstrate how the action of the temperature controllers adjust the reflux flows, which indirectly adjust the vessel holdups such that the final products are of high purity.

Similar results for feed mixture z_{F2} are shown in Figure 5. The initial vessel holdups are as for feed mixture z_{F1} , but the simulations demonstrate how the temperature controllers indirectly adjust the vessel holdups such that the steady-state vessel compositions are the same as for feed mixture z_{F1} . From the second row in Table 6 we see that the steady state holdups with feed mixture z_{F2} vary from 0.788 kmol in vessel 2 to 4.159 kmol in vessel 3.

Two remarks about the results are in order.

1. From Figures 4(e) and 5(e) we observe that the controlled temperatures reach their setpoint with no offset ($T \rightarrow T_s$ as $t \rightarrow \infty$), even though only proportional controllers

are used. The reason is that the model from L_i to T_i contains an integrating element, since the system is closed. More specifically, consider the reflux L_i to a column section and the temperature T_i in the that section. We know that we can change the steady-state value of T_i by changing L_i . We also know that a steady-state change in L_i is not allowed, since we must have $L_i \rightarrow V_i$ as $t \rightarrow \infty$ (total reflux operation). Thus the transfer function from L_i to T_i must contain an integrator.

2. With temperature control we achieve the same steady-state compositions in the vessels independent of the initial feed composition (only the vessel holdups differ at steady state). The reason is that the column has only three degrees of freedom at steady state and if we fix three temperatures at three locations in the column, then the temperature profile over the column at total reflux is determined. (This assumes that we do not have multiple steady states. Multiple solutions are not likely when temperatures are specified, but may be encountered if we specify the composition of a given component.)

We have also performed some simulations to study the start-up for the case when the entire feed mixture is charged to the reboiler (and not distributed to the vessels as in Figure 4). The composition responses for feed mixture $z_{F,1}$ are presented in Figure 6 (a) and (b). The results indicate that the temperature controllers can be activated immediately after start-up; possibly with some strategy to ensure that the vessels are not emptied. The vessels are then slowly filled up by action of the temperature controllers which reduce the reflux flows for a transient period (see Figure 6 (c) and (d)). The simulations indicate that, except for the initial 2 to 3 hours, the required time to reach a desired separation is similar to that found when the feed is initially distributed to the vessels.

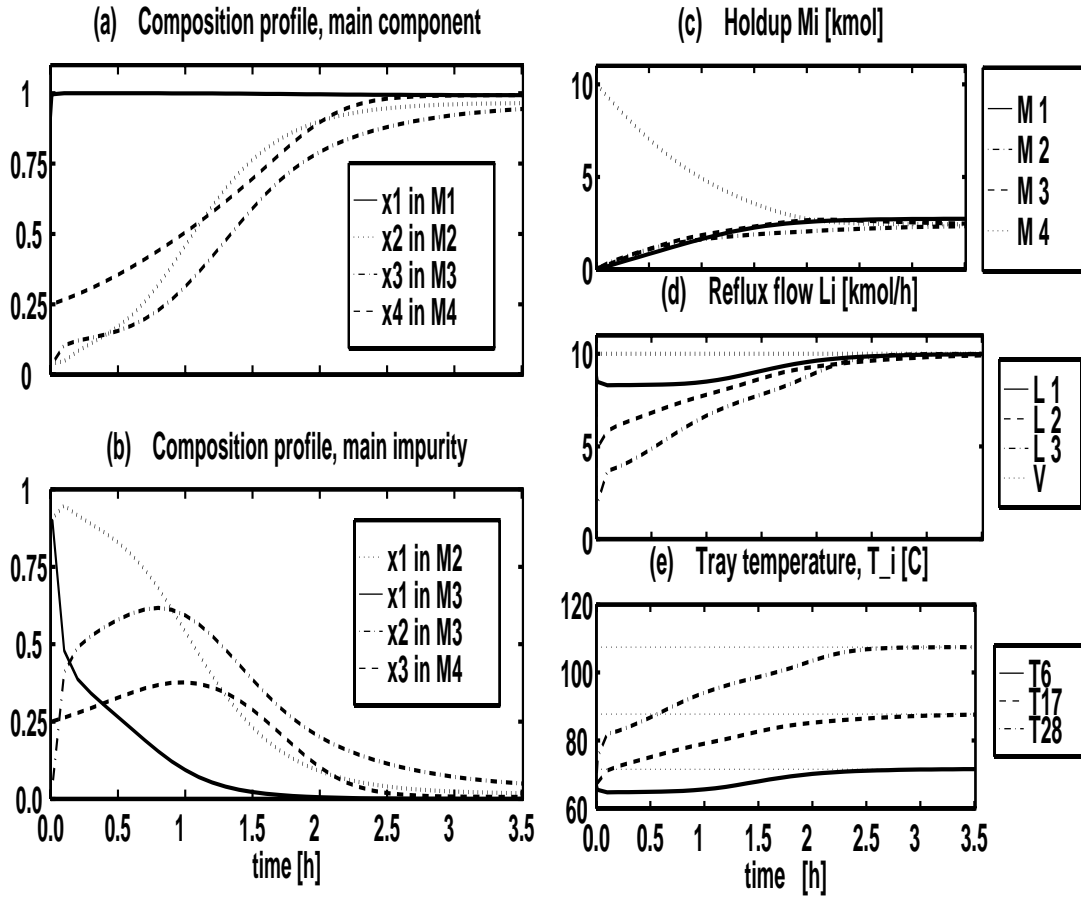


Figure 6: Temperature control for feed mixture $z_{F,1}$ with all liquid initially in the reboiler: Vessel compositions (a), impurities (b), holdups (c), reflux flows (d) and tray temperatures (e) as a function of time

5 Achievable separation

Table 7: Temperature control (independent of feed composition): Steady-state vessel compositions (main component) as a function of number of stages N_i in each section.

N_i	Vessel 1	Vessel 2	Vessel 3	Vessel 4
	x_1	x_2	x_3	x_4
7	0.965	0.864	0.856	0.965
9	0.984	0.932	0.923	0.984
11 (base case)	0.993	0.967	0.960	0.993
15	0.998	0.992	0.990	0.999
19	0.9997	0.9982	0.9974	0.9997
25	0.9999	0.9998	0.9997	0.9999

The achievable separation is limited by the number of theoretical stages in the column sections. Or, stated in another way, if there are no thermodynamic limitations caused by azeotropes etc., then we can achieve any desired purity in a multivessel column if we have a sufficient number of stages. This is demonstrated in Table 7 where we present the steady-state product compositions for different numbers of theoretical stages, N_i , in the three column sections. The total number of stages is $3 \cdot N_i$. We use the same components as before (the feed composition does not matter), and use temperature controllers with the setpoints given in Table 4. With 7 stages in each section we achieve a purity of about 86% in vessels 2 and 3, with 11 stages (base case used in rest of paper) about 96%, with 15 stages about 99%, and with 25 stages about 99.97%.

6 Discussion

One justification for using multivessel distillation instead of conventional batch distillation is to save energy, or equivalently, for a given heat input the batch time may be significantly shorter. Another advantage is the simple operation of the multivessel column under total reflux. A third advantage is that it may be easier to operate the column close to optimum with the multivessel column. In conventional batch distillation the optimal operation may depend on the reflux policy and quite strongly on the use of off-cuts to achieve the desired product composition. On the other hand, in the multivessel batch column there are fewer degrees of freedom and this simplifies the operation considerably; the reflux flow is adjusted with simple temperature controllers such that the desired products are accumulated in the vessels.

One disadvantage with the multivessel column compared with the conventional batch distillation is that the column itself is more complicated. Also, whereas in a conventional batch column one only has to make decision on the length of one single column section, one has to decide on the number of sections and their length for a multivessel column. The design of the multivessel columns is therefore more closely linked to a specific feed mixture, in particular the relative volatility and the product specifications. Thus, the design process of a multivessel column is similar to the design of a sequence of continuous distillation columns.

A simple practical implementation, which is used in our lab-scale column, is to place the sections and stages on top of each other as indicated in Figure 1. The liquid then flows by the influence of gravity and there is no need for pumps. However, this design is rather inflexible, and it cannot be used if a large number of stages is required. For an industrial multi-purpose separation facility, it is probably better to place the column sections in series with the vessels at ground level as indicated by Hasebe *et.al.* (1995). Reflux pumps are then needed to bring the liquid from the vessels to the column sections. In this case, one can quite easily put several column sections in series to meet the separations requirements for a given feed mixture.

Although the results presented in this paper on the temperature controlled multi-vessel column are most encouraging, a number of questions are open for further research.

1. The simulations need to be verified experimentally. This work is in progress, and preliminary results (Wittgens *et.al.* 1996) show very good agreement with the simulations.
2. The start-up procedure needs to be studied in more detail, including the initial distribution of the feed mixture.
3. In this study the setpoints for the temperature controllers were set such that the temperature in the middle of the section should equal the average of the boiling points of the components separated in that section. In general, this is not optimal, especially if the requirements for product purities are very different.
4. It should be established for what type of mixtures and conditions the new multivessel batch column is most suited.
5. Reasonable criteria for aborting the total reflux operation should be established, that is, when is the improvement in product purity too slow to justify further operation, and how should this be detected.
6. Finally, the total reflux operation may be generalized by also allowing withdrawal of products (continuous or discontinuous) from the vessels. In this way the multivessel column forms a “super structure” which has as special cases all the previously proposed batch schemes mentioned in the introduction.

7 Conclusions

A general multivessel batch distillation column is proposed, along with a new control strategy for its total reflux operation. It is shown that the proposed control scheme is easy to implement and operate, in particular, for widely varying feed compositions.

Notation

D	Distillate flow rate [kmol/h]	T	Temperature [C]
K	Controller gain	T_b	Boiling temperature [C]
L	Reflux flow rate [kmol/h]	V	Vapor flow [kmol/h]
M	Holdup [kmol]	x	Liquid composition
N_c	Number of components	y	Vapor composition
N_i	Number of stages in section i	z_F	Feed composition
t	time [h]	α	Relative volatility

Subscripts

i	section identifier
j	component identifier
k	stage identifier
s	setpoint

References

- [1] Bernot, C., M.F. Doherty and M.F. Malone, "Feasibility and Separation Sequencing in Multicomponent Batch Distillation", *Chemical Engineering Science*, 1311-1326, 1991
- [2] Bortolini, P. and Guarise, G.B., "Un nuovo metodo di distillazione discontinua (In Italian; A new practice of Batch Distillation)", *Quad. Ing. Chim. Ital.*, Vol. 6, No. 9, 150-159, 1970
- [3] Davidyan, A.G., V.N. Kiva, V.M. Platonov, "Batch Distillation in Column with Middle Reservoir", *Theo. Found. of Chem. Eng.* (In Russian), 467-475, 771-781, 1991
- [4] Davidyan, A.G., V.N. Kiva, G.A. Meski and M. Morari, "Batch distillation in a column with a middle vessel", *Chem. Eng. Sci.*, Vol. 49(18), 3033-3051, 1994
- [5] Hasebe, S., B. Abdul Aziz, I. Hashimoto and T. Watanabe, "Optimal Design and Operation of Complex Batch Distillation Column", *Preprint of the IFAC Workshop on Interaction between Process Design and Process Control*, London, 1992, 177-182
- [6] Hasebe, S., T. Kurooka and I. Hashimoto, "Comparison of the Separation Performances of a Multi-effect Batch Distillation System and a Continuous Distillation System", *Proc. IFAC-symposium DYCORD'95*, Denmark, June 1995, 249-255
- [7] Meski, G.A. and Morari, M., "Design and operation of a batch distillation column with a middle vessel", *Com. Chem. Engng.*, Vol. 19, S597-S602, 1995
- [8] Mujtaba, I.M. and S. Macchietto, "Optimal operation of reactive batch distillation", *AIChE 1992 Annual Meeting*, Miami Beach, November 1992.

- [9] Mujtaba, I.M. and S. Macchietto, "Optimal operation of multicomponent batch distillation - a comparative study using conventional and unconventional columns", *Preprints IFAC Symposium ADCHEM'95*, Kyoto (Japan), 415-420, May 1994.
- [10] Robinson, C.S. and E.R. Gilliland, "Elements of Fractional Distillation", *McGraw Hill Book Company*, New York, 4th ed., 1950
- [11] SPEEDUP Release 5.4 User Manual, Prosys Technology Ltd., 1993
- [12] Sørensen, E. and S. Skogestad, "Optimal Operating Policies of Batch Distillation", *Proc. Symposium PSE'94*, Kyongju, Korea, June 1994, 449-456
- [13] Sørensen, E. and S. Skogestad, "Comparison of Inverted and Regular Batch Distillation", *Proc. IFAC-symposium DYCORS'95*, Denmark, June 1995, 141-146
- [14] Treybal, R.E., "A Simple Method of Batch Distillation", *Chemical Engineering*, 1970, 95-98
- [15] Wittgens, B., Litto, R., Sørensen, E. and S. Skogestad, "Total Reflux Operation of Multivessel Batch Distillation", *ESCAPE-96, Computers chem. Engng.*, Vol. 20, S1041-1046, 1996

Appendix

Mathematical model of multivessel column

The model used in the simulations is based on the following assumptions:

- constant relative volatility
- constant molar liquid holdups on the stages (liquid flow dynamics neglect)
- constant molar vapor flows V_i (energy balance neglected)
- constant pressure
- constant tray efficiency (100 %)
- negligible vapor holdup
- perfect mixing on all trays and in all vessels
- total condenser

The distillation column is modeled as a stack of stages (counted from the top). Note that the vapor flow V does not pass through the intermediate vessels so these do not contribute to the number of theoretical stages. The model for stage k in section i consists of a material balance for each component j (M_k is assumed constant)

$$M_k \frac{d x_{j,k}}{dt} = L_i (x_{j,k-1} - x_{j,k}) + V (y_{j,k+1} - y_{j,k}) \quad (5)$$

and the vapor liquid equilibrium

$$\alpha_j = \frac{y_{j,k}/x_{j,k}}{y_{H,k}/x_{H,k}} \quad (6)$$

where H denotes the heaviest component in the mixture.

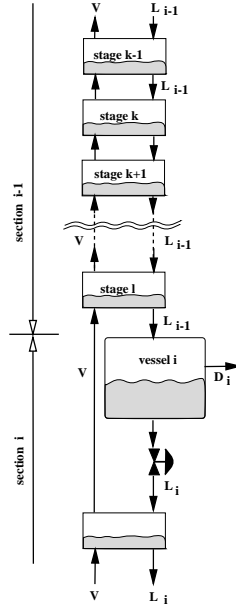


Figure 7: Connection of trays and vessels

The material balance for the condenser ($i = 1$) is

$$\frac{d (M_i x_{j,i})}{dt} = V y_{j+1,i} - L_i x_{j,i} \quad (7)$$

and its mass balance

$$\frac{d M_i}{dt} = V - L_i \quad (8)$$

For intermediate vessels (i)

$$\frac{d (M_i x_{j,i})}{dt} = L_{i-1} x_{j-1,i} - L_i x_{j,i} \quad (9)$$

with

$$\frac{d M_i}{dt} = L_{i-1} - L_i \quad (10)$$

where x_i is the composition in vessel i and $x_{j-1,i}$ is the liquid composition at the bottom of the section above. The liquid flow L_i leaving vessel i is set by a control valve.

The reboiler ($i = R$)

$$\frac{d (M_i x_{j,i})}{dt} = L_{i-1} x_{j,i} - V y_{j,i} \quad (11)$$

where

$$\frac{d M_i}{dt} = L_{i-1} - V \quad (12)$$

where again the vapor liquid equilibrium is described by Equation 6.