

# Multi-product dividing wall columns: A simple and effective assessment and conceptual design

Ivar J. Halvorsen<sup>1</sup>, Sigurd Skogestad<sup>2</sup>, Igor Dejanović<sup>3</sup>, Ljubica Matijašević<sup>3</sup>, Žarko Olujić<sup>4</sup>

<sup>1</sup>SINTEF ICT, Applied Cybernetics, P.O.Box 4760, N-7465 Trondheim, Norway.

<sup>2</sup>Norwegian University of Science and Technology, Department of Chemical Engineering, N-7491 Trondheim, Norway. <sup>3</sup>University of Zagreb, Department of Chemical Engineering and Technology, 10000 Zagreb, Croatia.

<sup>4</sup>TU Delft, Process & Energy Laboratory, 2628 CA Delft, The Netherlands.

The objective of this paper is to further exploit and demonstrate the potential benefits of a Vmin-diagram based analysis, using a fifteen component feed mixture as base case. Detailed explanations are given on how to interpret properly a Vmin-diagram and use it for DWC assessment. Emphasis is set on how to set the component or fraction splits to maximize potential gains as well as how to handle some variations in the feed with the same purpose. Interestingly, it appeared that depending on the choice and specification of interesting products (components or fractions), a simplified four-product DWC and even a five-product DWC could be an interesting option for aromatics processing plant.

## 1. Introduction

Proven energy and capital saving potential of dividing wall columns (DWC) could be substantially increased if this technology would be applied to obtaining four or even more products (Dejanović et al., 2010). The design of a four-product DWC has been addressed and encouraging advancements made in a previous effort indicating that utilizing non-welded partition walls a packed DWC can be implemented either as a practical, single partition wall column, or a thermodynamically optimal, but complex, three-partition walls column, in an industrially viable way in an aromatics processing plants as encountered in complex refineries (Dejanović et al., 2011). The key to success in this respect was efficient utilization of so called Vmin-diagram method, as a simple but very effective means to identify and quantify accordingly internal configuration of a complex DWC, providing at the same time reliable data for initialization of detailed calculations using an appropriate rigorous simulator. In this paper a step further has been made, by using Vmin-diagram to demonstrate an alternative, simplified configuration for a four-product DWC and a five-product DWC.

## 2. The Vmin-diagram

We will here describe the Vmin-diagram, or minimum energy diagram, and how it can be used for assessment of multicomponent separations (Halvorsen and Skogestad, 2003a). We first consider a single two-product column with a multicomponent feed ( $F$ ).

The minimum energy requirement for a given product specification is determined by the minimum vapour flow through the feed stage with infinite number of stages. We consider the case with constant pressure. Then we have at steady state two degrees of freedom in operation. We choose to use the vapour flow rate above the feed ( $V/F$ ) and the net flow of product to the top ( $D/F$ ) per unit feed. For each given pair ( $D/F$ ,  $V/F$ ) all other properties are completely determined, such as all component recoveries and product compositions. The feed enthalpy condition is given by the liquid fraction ( $q$ ).

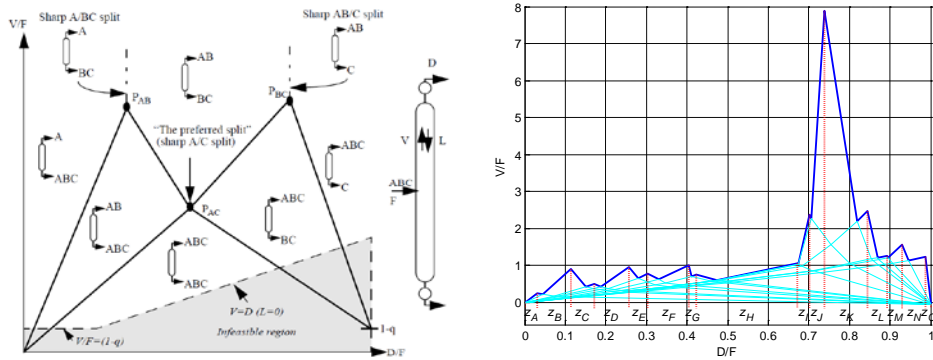


Figure 1.  $V_{min}$ -diagram for a ternary mixture (a) for a 15-component feed (b, right)

The  $V_{min}$ -diagram in Figure 1a shows how the feed components for a typical ternary feed (ABC) are distributed to the top and bottom products in a simple two-product “infinite stage” distillation column as a function of the operating point ( $D/F, V/F$ ). For values of  $V/F$  above the upper “mountain-like” boundary in the diagram ( $[0,0]-P_{AB}-P_{AC}-P_{BC}-[1,1-q]$ ), the column is over-fractionated, that is, we are wasting energy. The values at the peaks give vapour flow  $V_{min}$  for the corresponding sharp neighbour component splits. As the vapour flow  $V$  is reduced below the line for a given  $D$ , one more component will become distributed as we cross boundary lines. The point  $P_{AC}$  is the “preferred split” (Stichlmair, 1988) which is the minimum energy operating point for a sharp separation between the heavy and light keys while the intermediate distribute to both column ends. With the ternary feed, we only need three points:  $P_{AB}$ : sharp A/B,  $P_{BC}$ : sharp B/C and  $P_{AC}$ : sharp A/C. To find the diagram for  $n$  components in the feed, we need to solve for sharp split between each possible pair of key components ( $ij$ ) to find the  $n(n-1)/2$  points  $P_{ij}$ . The  $V_{min}$ -diagram for a 15 component aromatics feed (Dejanović et al., 2011) is shown in Figure 1b. Each of the 14 peaks represents  $V_{min}$  and  $D$  for sharp component split. We will in the following use this feed and assess alternatives for separating it into four fractions (A: 5 most volatile components, B: two components, C: one, and D: the six heaviest). Then we only need the six points related to the four product splits  $4(4-1)/2=6$  as opposed to  $15(15-1)/2=105$ . The highest peak in Figure 1b then need not to be considered since it is within the heavy group (D). We observe that  $V/F < 1$  for most of the remaining sharp splits. For real mixtures the diagram can be made by using a commercial simulator. For ideal mixtures with constant relative volatility and constant molar flows the  $V_{min}$  diagram can be calculated in milliseconds by use of the classical Underwood equations. This is applied in this paper.

### 3. Minimum energy of generalized DWC from the Vmin-diagram

The real power of the Vmin-diagram is that it contains all necessary information to calculate the overall minimum energy requirement and all the internal flow rates for an optimally operated extended Petlyuk arrangement for an arbitrary multicomponent feed and any number of products (Halvorsen and Skogestad, 2003b). The overall minimum energy is simply given by the highest peak. This peak represents the most difficult product split in a two-product column. It may be a bit surprising that by supplying this vapour rate to an extended four product Petlyuk arrangement as shown in Figure 2 we get all the other products separated for “free”. The key is that in an optimally operated arrangement, each sub-column must be operated at its local “preferred split”. Generally we would need to calculate the minimum energy for each succeeding column, but at minimum energy operation all the information can be obtained from the Vmin-diagram which is based on feed data only. Each section’s vapour flow and net top product flow can be found as a difference between the peaks and knots in the Vmin-diagram as illustrated in Figure 2. (Superscripts denote sub-columns, and the subscripts T and B denote the top or bottom section in that sub-column). The liquid flow rates and bottom net flows are uniquely determined from simple mass balances.

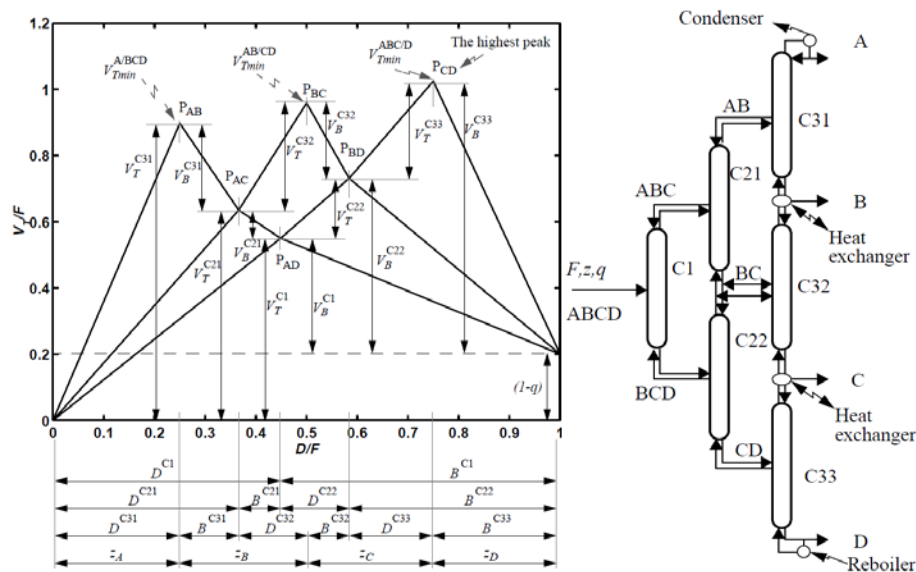


Figure 2. Vmin-diagram for 4-component feed, also showing how the internal flows in the complex extended four product Petlyuk arrangement are found.

### 4. Interpretation of the Vmin-diagram

The Vmin-diagram gives important information about the load in each section of a DWC. The peaks are normally of different heights, indicating that the vapour loads for the different product separations also are different.

#### 4.1 Increased 2<sup>nd</sup> law thermodynamic efficiency

One may in order to improve the thermodynamic (2<sup>nd</sup> law) efficiency apply heat exchange at each side-stream stage as illustrated in Figure 2 and condense or vaporize an amount of vapour/liquid representing the difference in the height of the peaks. For limited heat removal and differences less than the total side stream, an alternative is to extract a part of the side stream product as vapour. However, use of external heat exchangers is not practised in conjunction with DWC columns. Nevertheless, for certain cases with large differences it might be a good idea to do it, and also reduce diameter in the upper part.

#### 4.2 A practical four product (4p) DWC

The vapour flow corresponding to the highest peak is normally supplied in the reboiler and passes through the whole arrangement. The DWC shown in Figure 4a is equivalent to the extended Petlyuk arrangement in Figure 2 without heat exchangers. The splits corresponding to the other peaks will then be done with higher vapour rate than actually required. This gives a certain tolerance in the operation which may be beneficial, since each sub-column does not have to be operated exactly at its local preferred split. This gives us more flexibility in both design and operation. In our 4p example the peak  $P_{CD}$  representing the C/D split sets the overall minimum vapour flow rate requirement. However, the parts of the arrangement leading up to the other products are in a way “over-refluxed”. This gives us the possibility to alter operation of the internal sub-columns, as long as this is done in a way that does not affect the “highest peak”. When we choose an operating point above the local preferred split for a sub-column we get a new  $V_{min}$ -diagram for the succeeding part of the arrangement where the peaks now are somewhat lifted as illustrated in Figure 3.

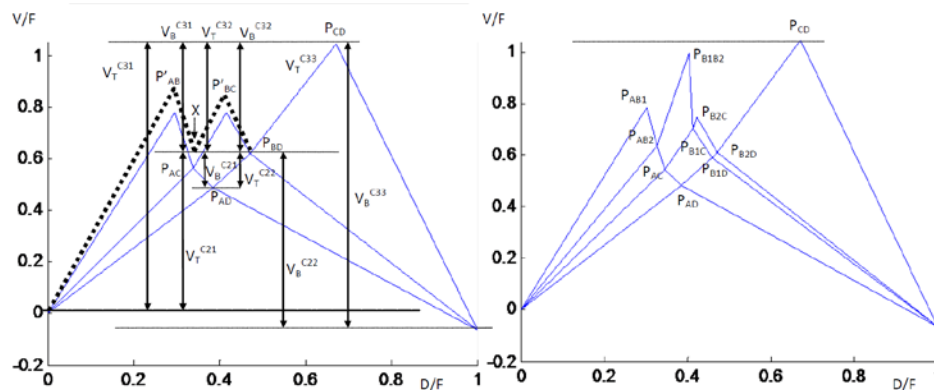


Figure 3.  $V_{min}$  diagram for 4p feed (left) also showing how peaks  $P'_{AB}$  and  $P'_{BC}$  are lifted when the flow in C21 are set to make vapour flow in top of C22 equal to bottom of C21.  $V_{min}$  diagram for 5p feed where we split B into two components B1 and B2.

This can be done by accurate calculations, but we will only discuss it qualitatively here. When we consider the practical 4p DWC we may choose to have pure liquid connection into the feed junction of sub-column C32. This calls for equal vapour flow in top of C22 and bottom of C21. To obtain this, the vapour through C21 must be increased in a way

that the point  $P_{AC}$  representing the A/C split (which is carried out in C21) is aligned with the point  $P_{BD}$ , representing the B/D split (which is carried out in C22). This will lift either peak  $P_{AB}$  or  $P_{BC}$  or both. In the illustrated case we find a solution where the lifted peaks still are below the highest peak. Thus the proposed practical arrangement with no vapour crossing into C32 is feasible, and there is also a certain tolerance in selection of operating point (X in Figure 3). We then continue and look closer at operation of the prefractionator (C1). If we move the operating point along the boundary line from the preferred split at  $P_{AC}$  towards  $P_{BC}$  this will not lift the highest peak  $P_{CD}$ , only  $P'_{AB}$ , and the point  $P'_{AC}$ . As long as the lifted  $P'_{AB}$  is below  $P_{CD}$  we do not increase the overall vapour flow demand. Due to the different height of peaks we obtain some tolerance in operation that can be used for handling of feed property variations and uncertainties without increasing energy usage. It is common to keep the vapour splits fixed from design, but the liquid splits should be adjustable.

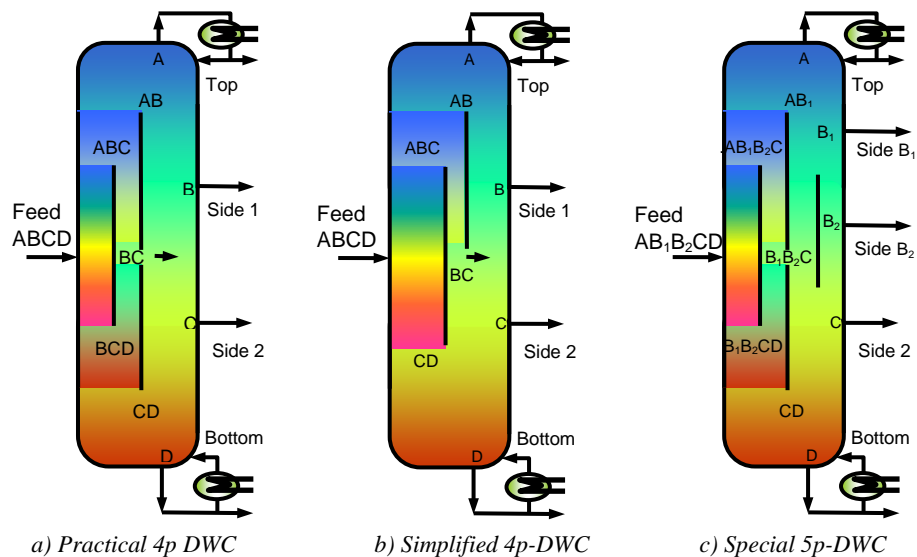


Figure 4. Multiple partition wall DWC configurations considered.

#### 4.3 Simplified four product column

In this particular case we actually may move the prefractionator operating point all the way to  $P_{BD}$ . As we approach the net distillate product from sub-column C22 goes to zero, thus, C22 becomes superfluous and can be removed. At the bottom of C1 we only have components CD and these can be passed directly to sub-column C33. Sub-column C32 gets its feed from the bottom of C21 only. In a DWC configuration we may actually remove the lower right partition wall as shown in Figure 4b. The prefractionator (C1) has to take an increased load, so the partition wall must be shifted closer to the centre of the column. But, the overall vapour flow rate and thereby the diameter of the DWC can remain unchanged. This solution is only possible without increase in energy because the peaks  $P_{AB}$  and  $P_{BC}$  are considerably lower than  $P_{CD}$ .

#### 4.4 Five product DWC

The general five product (5p) DWC would require another set of partition walls. In the general Petlyuk system we would need another set of sub-columns C41, C42, C43 and C44. However, we have some tolerance due to the different height of the peaks, so there may be some simple solutions. And there is. Assume now that we separate our previous B-product consisting of two components into  $B_1$  and  $B_2$ . From the Vmin-diagram we observe that the peak representing the  $B_1/B_2$  split is also below the peak for C/D. Thus, separating  $B_1$  and  $B_2$  is in theory possible without adding more energy, and with the same column diameter. We would have to add more stages, though, so the column height will have to be increased accordingly. Figure 4c illustrates how we can do this by adding an extra partition wall only in front of the new outlet for  $B_2$ . This is equivalent to replacing sub-column C32 with a three-product DWC, fully thermally coupled to C31 and C33. To obtain this, the columns C21 and C22 is operated as in the 4p-arrangement namely to separate  $A/B_1$  and  $B_2/D$ , while they rather should have been operated to separate  $A/B_2$  and  $B_1/D$  if the full 5p procedure should be followed which implies to run each internal sub-column at its local preferred split and by that remove only one and one component from each end.

### 5. Conclusion

The Vmin-diagram can be used both for qualitative assessment of multicomponent separations and for the detailed calculation of internal flow rates in complex dividing wall columns. The highest peak sets the overall energy requirement for sharp product splits while the height and position of the other peaks and knots gives information about internal loads and also the possibilities for variation in operating conditions. This is important in order to be able to handle inevitable variations in feed properties and column performance and still obtain the potential energy savings in practice.

### 6. References

- Dejanović, I., Matijašević, L., Halvorsen, I. J., Skogestad, S., Jansen, H., Kaibel, B. & Olujić, Ž. 2011. Designing four-product dividing wall columns for separation of a multicomponent aromatics mixture. *Chemical Engineering Research and Design* (submitted).
- Dejanović, I., Matijašević, L. & Olujić, Ž. 2010. Dividing wall column - A breakthrough towards sustainable distilling. *Chemical Engineering and Processing*, 49, 559-580.
- Halvorsen, I. J. & Skogestad, S. 2003a. Minimum energy consumption in multicomponent distillation. 1. V-min diagram for a two-product column. *Industrial & Engineering Chemistry Research*, 42, 596-604.
- Halvorsen, I. J. & Skogestad, S. 2003b. Minimum energy consumption in multicomponent distillation. 3. More than three products and generalized Petlyuk arrangements. *Industrial & Engineering Chemistry Research*, 42, 616-629.
- Stichlmair, J. 1988. *Distillation and Rectification. Ullmann's Encyclopedia of Industrial Chemistry*. Wiley-VCH.